HSF	禁止使用1级环境管理物质

Note:

Materials:

.Plunger: Brass 32u" Au over 50u" Ni

.Barrel: Brass 52u" Au over 50u" Ni

.Spring: SUS

Mechanical:

.Contact force: 110g±20% at 0.7mm working stroke

.Life test: 20,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 1A

.Contact resistance: 50 milliohm Max.

To ensure the best usage, please operate it based on the working height.
Based on the engineering drawings, shall not exceed the maximum allowed compression.

Approve Sign

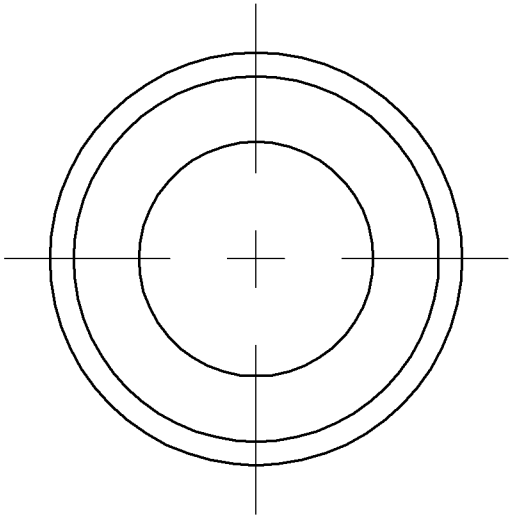

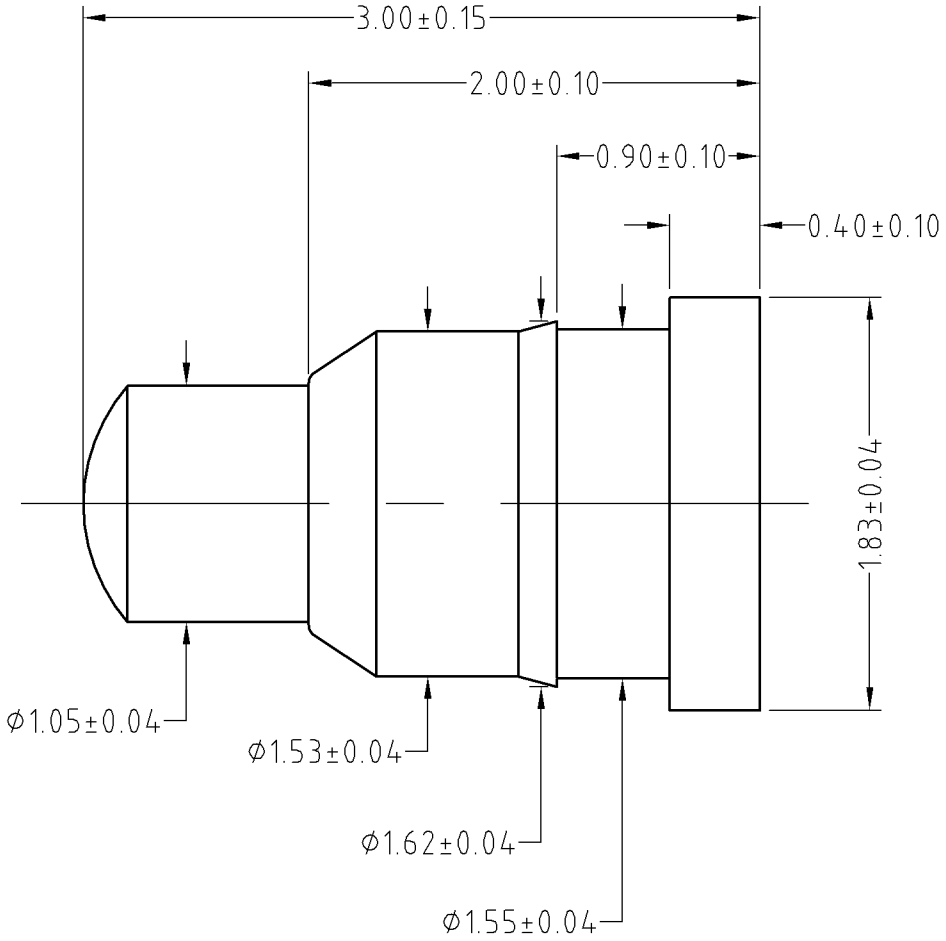

SCALE	10:1	UNIT:mm
ANGEL	±1°	A4
0.000	±0.02	
0.00	±0.05	DRAW
0.0	±0.10	CHECK
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO

THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.

SHEET: 1 of 1

CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.

PART NO.	BF01811
FILE NAME	BF01811
TITLE.	Pogo pin connector

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
———	D0	2012.03.06	NEW		