HSF	禁止使用1级环境管理物质

Approve Sign

Note:

Materials:

.Plunger: Brass 20u" Au over 50u" Ni

.Barrel: Brass 20u" Au over 50u" Ni

.Spring: SUS 2u" Au

Mechanical:

.Contact force: 50g±20g at 0.7mm working stroke

.Max. stroke: 1.4mm

.Life test: 20,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 2A

.Contact resistance: 50 milliohm Max.

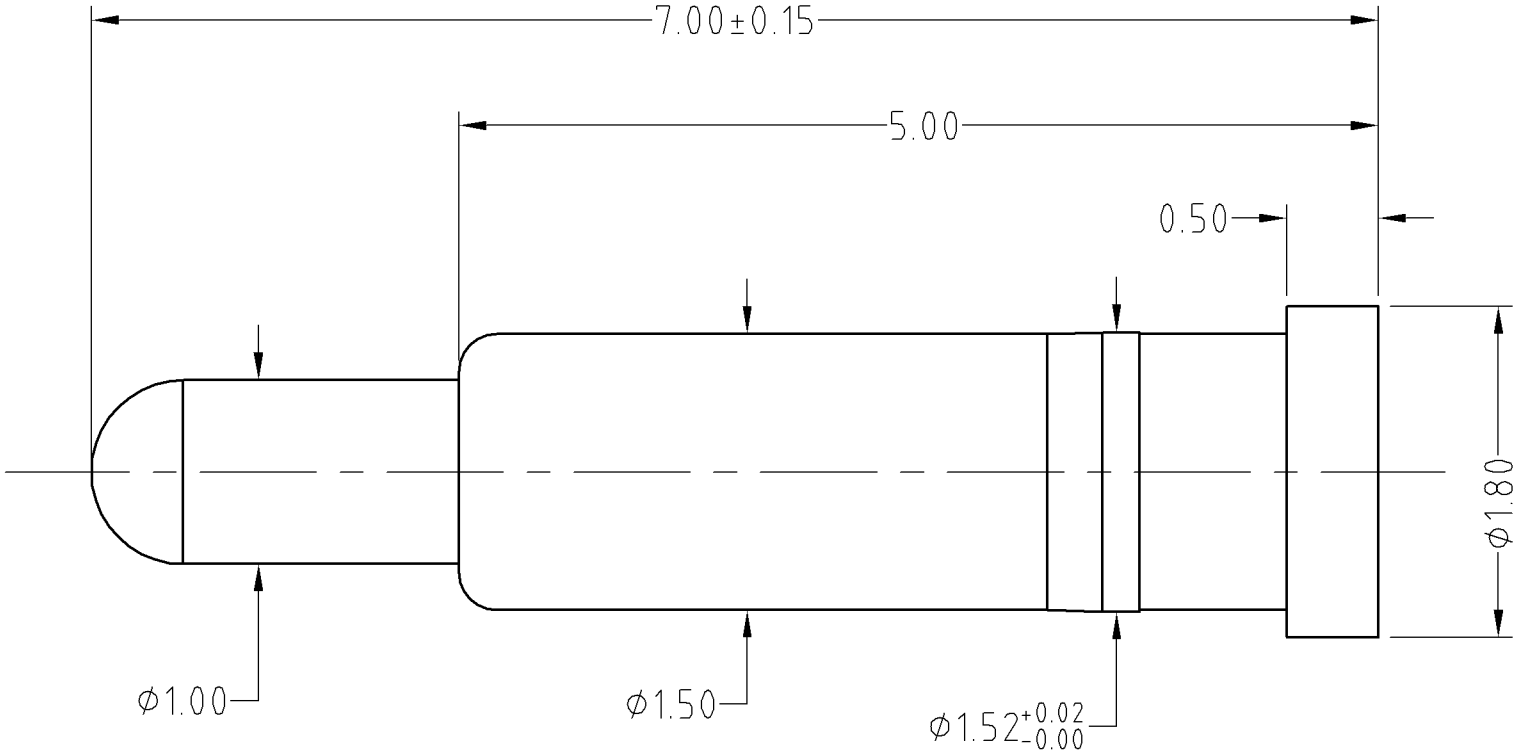

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPOPATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4			
0.000	±0.02		SHEET: 1 of 1		
0.00	±0.05	DRAW		PART NO.	BF04811
0.0	±0.10	CHECK		FILE NAME	BF04811
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		TITLE.	Pogo pin connector

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
———	A0	2013.07.25	NEW		