HSF	禁止使用1级环境管理物质

Note:

Materials:

.Plunger: Brass 10u" Au over Ni

.Barrel: Brass 5u" Au over Ni

.Spring: SUS

Mechanical:

.Contact force: 45g±10g at 0.5 working stroke

.Life test: 20,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 1A

.Contact resistance: 50 milliohm Max.

To ensure the best usage, please operate it based on the working height.
Based on the engineering drawings, shall not exceed the maximum allowed compression.

Approve Sign

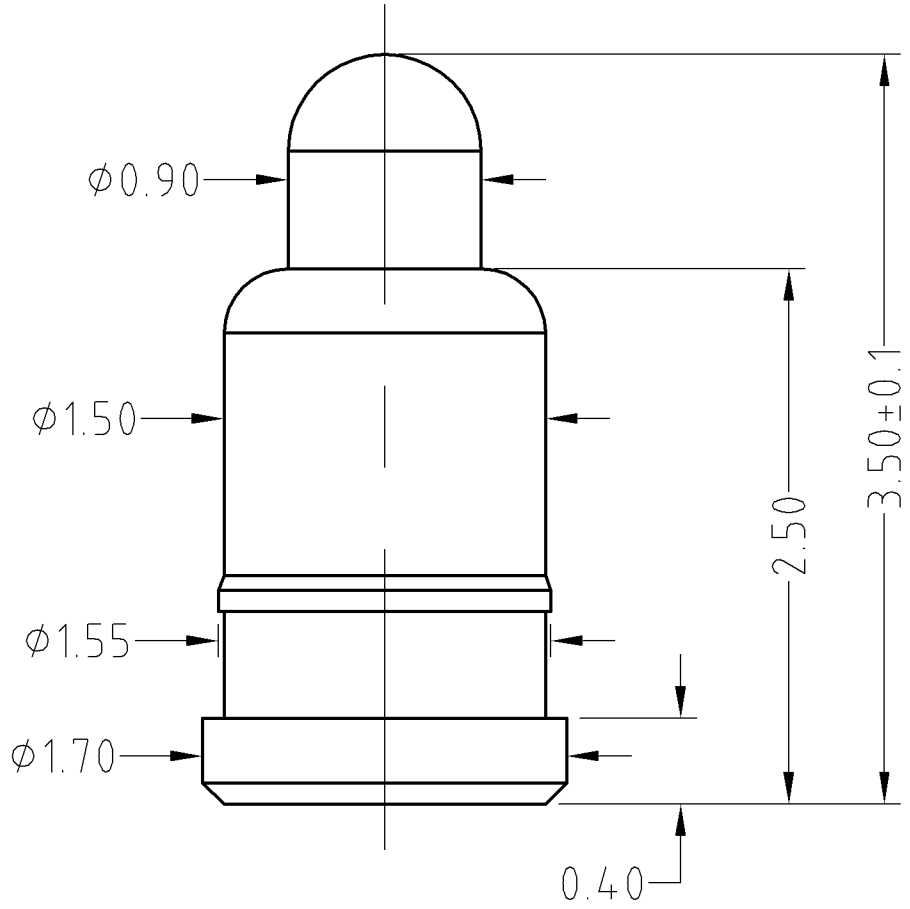

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.								
ANGEL	±1°	A4									
0.000	±0.02		SHEET: 1 of 1								
0.00	±0.05	DRAW									
0.0	±0.10	CHECK									
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO									

CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.

PART NO.	BF08811
FILE NAME	BF08811
TITLE.	Pogo pin connector

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
———	D0	2012.08.23	NEW		