Note:
Materials:
.Plunger: Brass 10u" Au over Ni.
.Spring: SUS surface treatment
.Barrel: Brass 10u" Au over Ni.
Mechanical:
.Contact force: 120g±30g at 1.0mm working stroke
.Full stroke: 1.40mm
.Life test: 50,000 cycles (working stroke)
Electrical:
.Rated current & voltage: DC12V; 1A Max.
.Contact resistance: 50 milliohm Max.

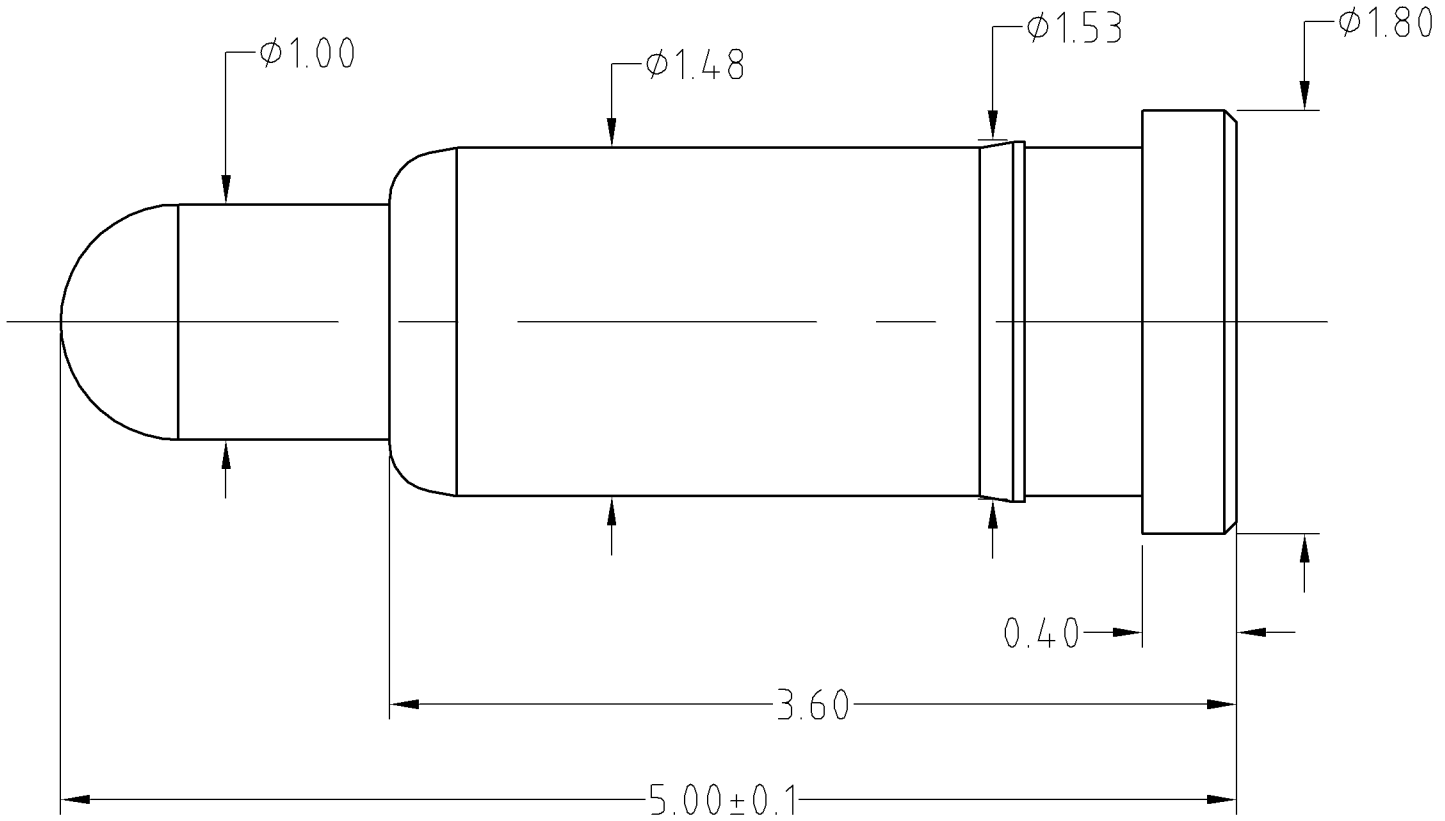

Approve Sign

———	D0	2013.05.30	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4				
0~6	±0.05		SHEET: 1 of 1			
6~30	±0.10	DRAW			PART NO.	BF15811
30~150	±0.15	CHECK			FILE NAME	BF158XX
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			TITLE.	Pogo pin connector