Note:

Materials:

.Plunger: Brass 20u" Au over Ni

.Barrel: Brass 20u" Au over Ni

.Spring: SUS surface treatment

Mechanical:

.Contact force: 50g±20% at 0.5mm working stroke

.Life test: 50,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 1A

.Contact resistance: 50 milliohm Max.

Cannot be used as the charging,

To ensure the best usage, please operate it based on the working height.

Based on the engineering drawings, shall not exceed the maximum allowed compression.

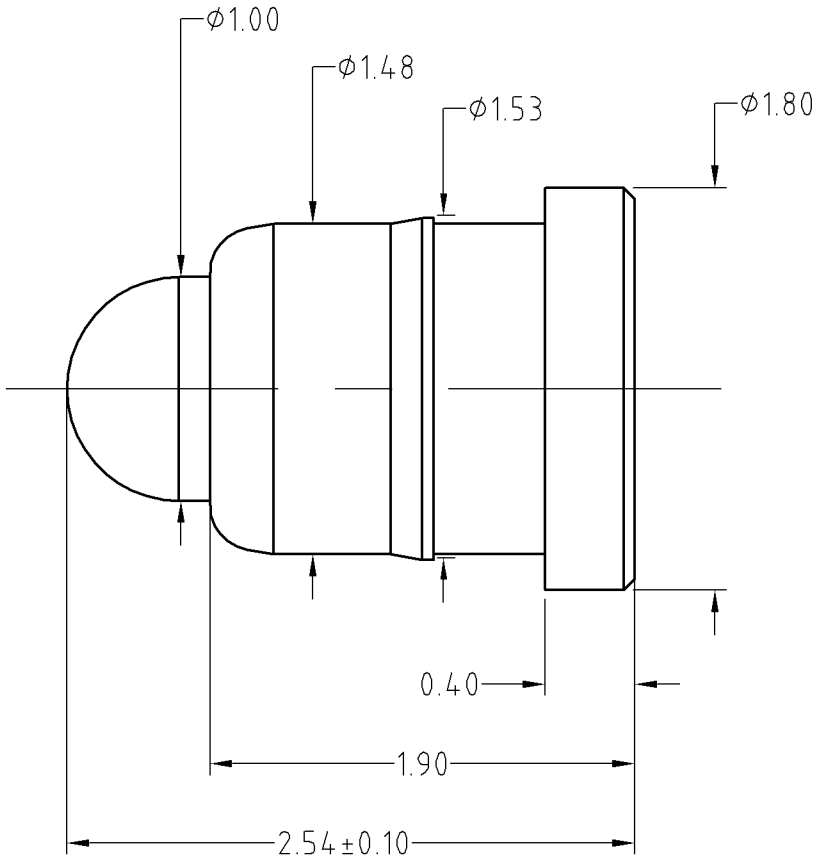

Approve Sign

ECN(DCN) NO.	REV	DATE	DESCRIPTION
———	A0	2014.05.14	NEW

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.		
ANGEL	±1°	A4					
0~6	±0.05		SHEET: 1 of 1				
6~30	±0.10	DRAW			PART NO.	BF19401	
30~150	±0.15	CHECK			FILE NAME	BF194XX	
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			TITLE.	Pogo pin connector	