Note:
Materials:
.Plunger: Brass 0.075um Au over Ni
.Barrel: Brass 0.075um Au over Ni
.Spring: SUS surface treatment
Mechanical:
.Contact force: 120g±20% at 1.80mm working height
.Life test: 50,000 cycles
Electrical:
.Rated current & voltage: DC 12V; 1.5A
.Contact resistance: 50 milliohm Max.
Cannot be used as the charging,

To ensure the best usage, please operate it based on the working height.
Based on the engineering drawings, shall not exceed the maximum allowed compression.

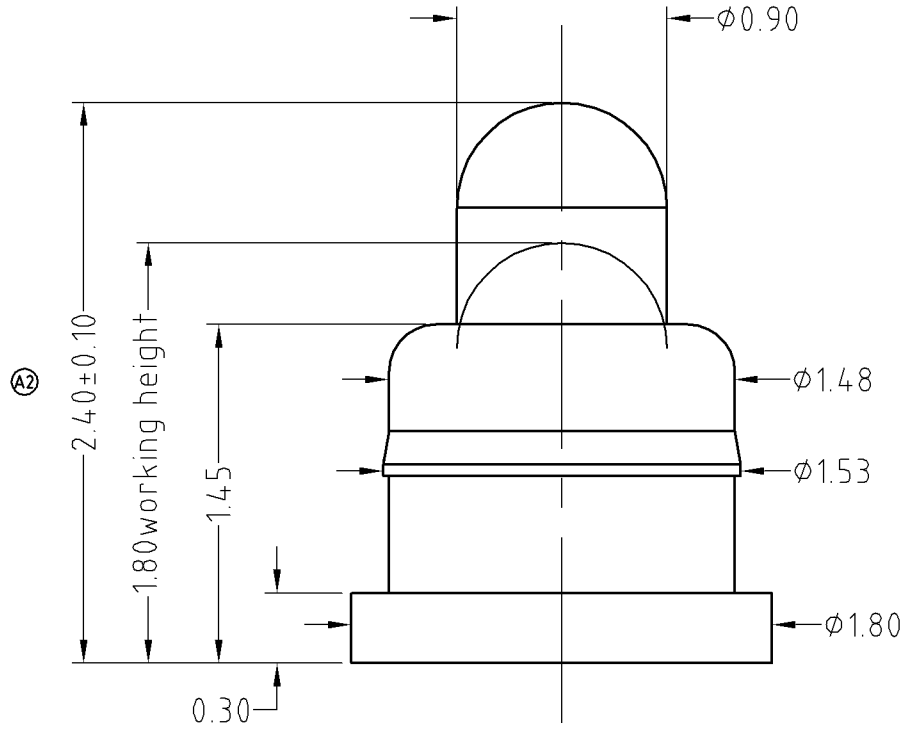

Approve Sign

BOM		
Part	NO.	Qty
Plunger	B385-P1003	1
Barrel	B385-B1003	1
Spring	B385-S1001	1

ECN(DCN) NO.	REV	DATE	DESCRIPTION
	A2	2015.05.18	修改总长
	A1	2015.03.30	修改总长
———	A0	2015.03.25	NEW

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4			
0~6	±0.10		SHEET: 1 of 1		
6~30	±0.15	DRAW		PART NO.	BF38511
30~150	±0.20	CHECK		FILE NAME	BF385XX
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		TITLE.	Pogo pin connector