Note:
Materials:
.Plunger: Brass 0.125um Au over Ni
.Barrel: Brass 0.075um Au over Ni
.Spring: SUS 304 surface treatment
Mechanical:
.Contact force: 100g±20% at 0.8mm working stroke.
.Max. stroke: 1.0mm
.Life test: 30,000 cycles
Electrical:
.Rated current & voltage: DC 12V; 1A
.Contact resistance: 50 milliohm Max.
Cannot be used as the charging

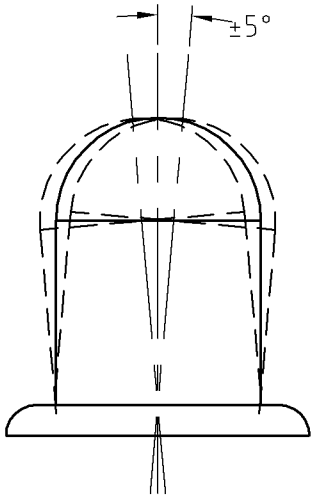

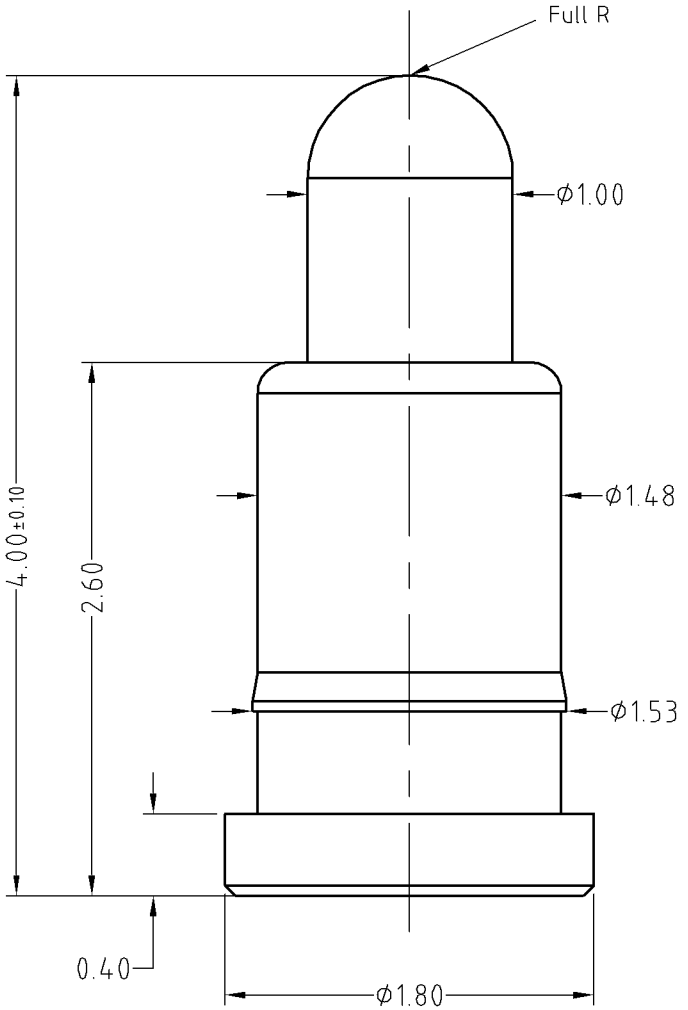

BOM		
Part	NO.	Qty
Plunger	B469-P1005	1
Barrel	M601-B7003	1
Spring	M607-S1001	1

———	A0	2015.07.07	NEW
ECN(DCN) NO.	REV	DATE	DESCRIPTION

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	
ANGEL	±1°	A4		
0~6	±0.05		SHEET: 1 of 1	
6~30	±0.10	DRAW		
30~150	±0.15	CHECK		
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		

东莞市川富电子有限公司
CFE CORPORATION CO.,LTD.

PART NO.	BF46911
FILE NAME	BF469XX
TITLE.	Pogo pin connector

Approve Sign