HSF	禁止使用1級環境管理物質

Note:

1.Mechanical demands
  1.Contact force: 45g±20% at 2.85 working height
  2.Plating plunger: Brass 3u" Au over 50~100u" Ni.
    Plating barrel: Brass 3u" Au over 50~100u" Ni.
    Plating spring: SUS 1u" Au
2.Inspection(working stroke)
  1.Rated current & voltage: DC12V; 1A
  2.Life test: 20,000 cycles

Approve Sign

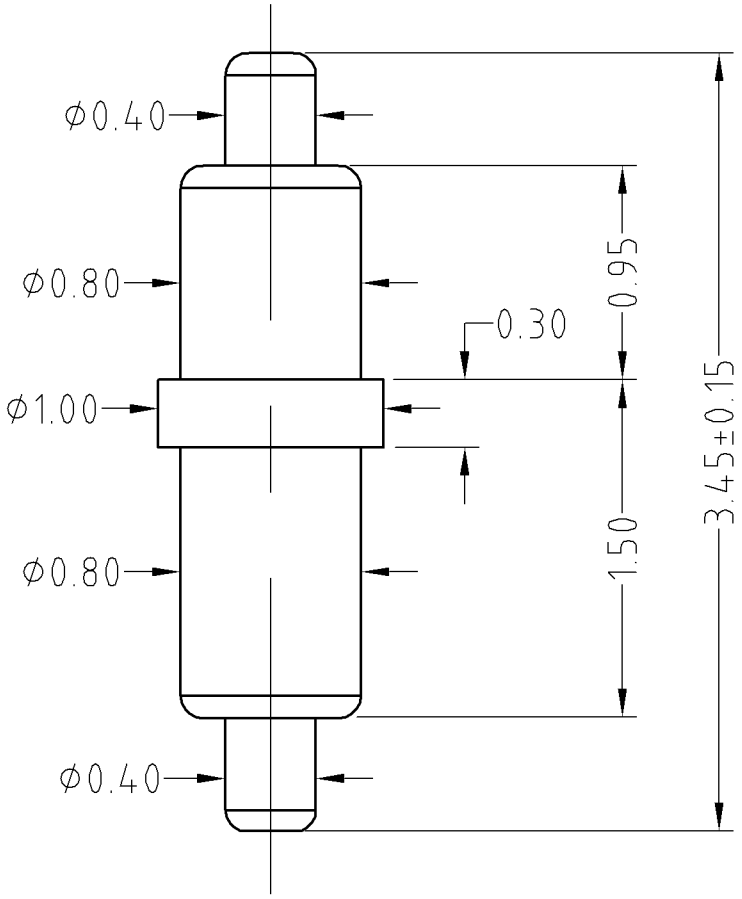

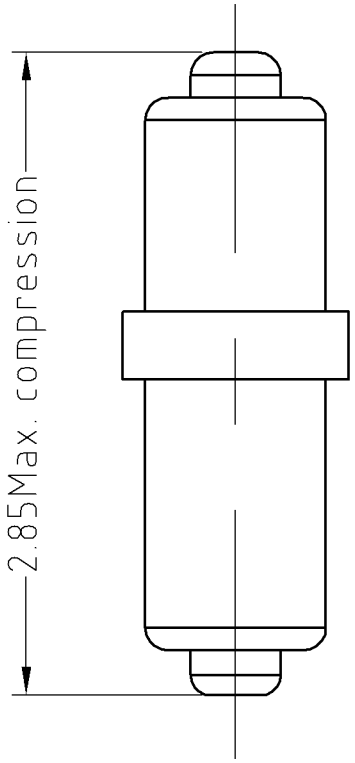

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPOPATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		E:\QQ\最新公司标志.jpg	川富科技股份有限公司 CFE CORPOPATION CO.,LTD.					
ANGEL	±1°	A4									
0.000	±0.02		SHEET: 1 of 1								
0.00	±0.05	DRAW			PART NO.	BD07511					
0.0	±0.10	CHECK			FILE NAME	BD07511					
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			TITLE.	Pogo pin connector					

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
———	D0	2012.08.23	NEW		

091210-BI051