Note:

Materials:

.Plunger: Brass 5u" Au over Ni

.Barrel: Brass 5u" Au over Ni

.Spring: SUS surface treatment

Mechanical:

.Contact force: 80g±20% at 4.50mm working height

.Life test: 20,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 1A

.Contact resistance: 50 milliohm Max.

To ensure the best usage, please operate it based on the working height.
Based on the engineering drawings, shall not exceed the maximum allowed compression.

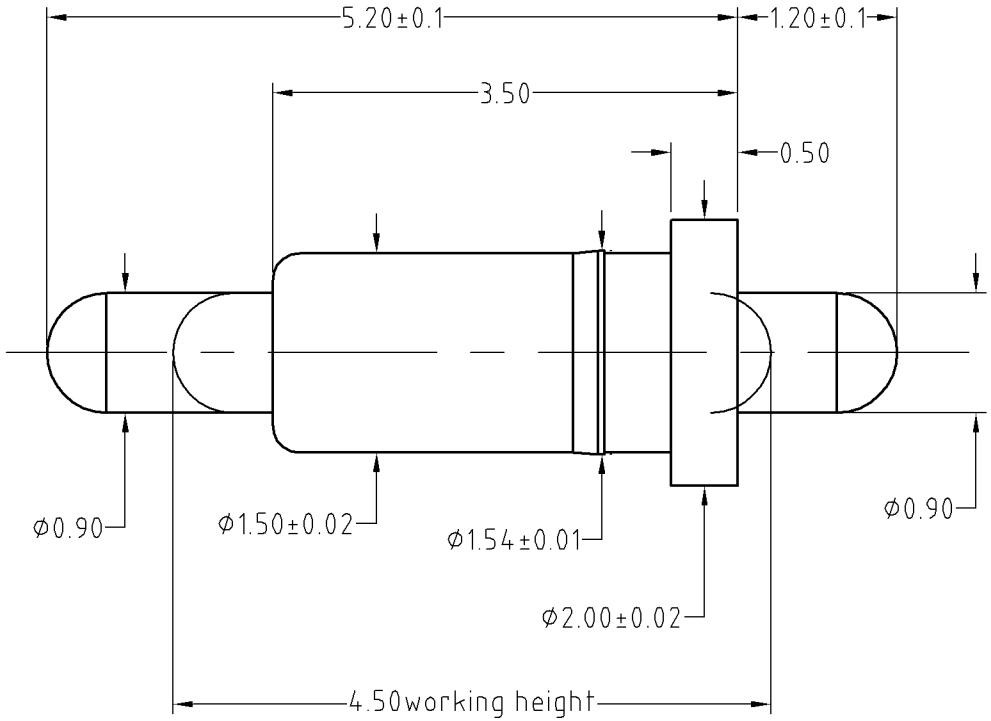

Approve Sign

CUSTOMER P/N: P03ZWQFA2600-P

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.		CFE 东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4				
0~6	±0.05		SHEET: 1 of 1			
6~30	±0.10	DRAW			PART NO.	BD18611
30~150	±0.15	CHECK			FILE NAME	BD186XX
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO			TITLE.	Pogo pin connector

ECN(DCN) NO.	REV	DATE	DESCRIPTION
———	D0	2013.05.30	NEW