IISF	禁止使用1级环境管理物质

Note:

Materials:

.Plunger: Brass C2700 3u" Au over 120u" Ni Min.

.Barrel: Brass C3604 3u" Au over 80u" Ni Min.

.Spring: SUS304

Mechanical:

.Contact force: 90g±20g at 0.6mm working stroke

.Life test: 10,000 cycles

Electrical:

.Rated current & voltage: DC 12V; 1A

.Contact resistance: 100 milliohm Max.

Approve Sign

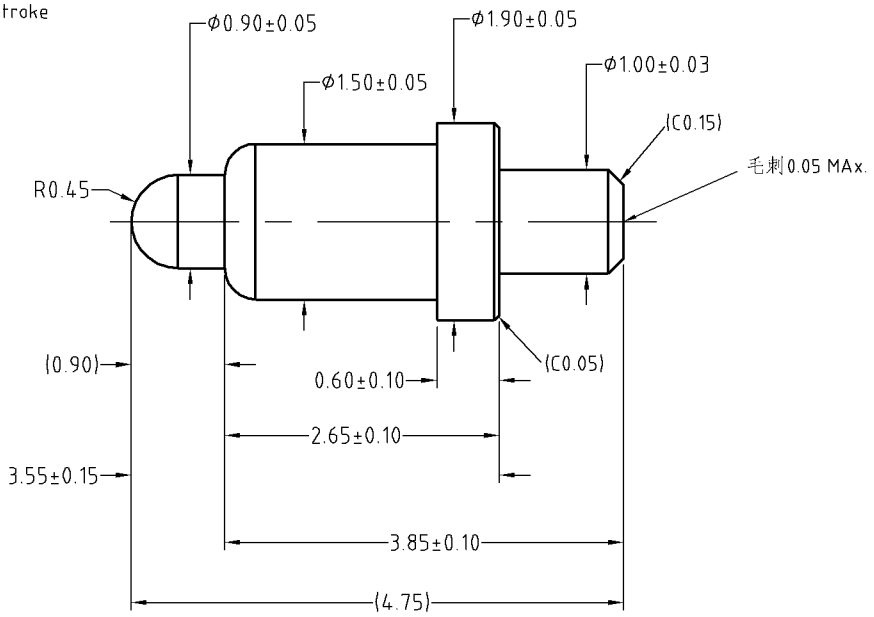

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPOPATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4			
0.000	±0.02		SHEET: 1 of 1		
0.00	±0.05	DRAW		PART NO.	BP04632
0.0	±0.10	CHECK		FILE NAME	BP04611
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		TITLE.	Poga pin

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
————	A0	2013.07.20	NEW		