

HSF 禁止使用1级环境管理物质



Note:

1.Mechanical demands

- .Contact force: 110g±20% at 1.50mm working stroke
- .Plating plunger: Brass 3u" Au over 50u" Ni.
- .Plating barrel: Brass 3u" Au over 50u" Ni.
- .Plating spring: SUS 1u" Au

2.Inspection(working stroke)

- .Rated current & voltage: DC12V; 2A Max.
- .Life test: 100,000 cycles
- .Contact resistance: 50 milliohm Max.

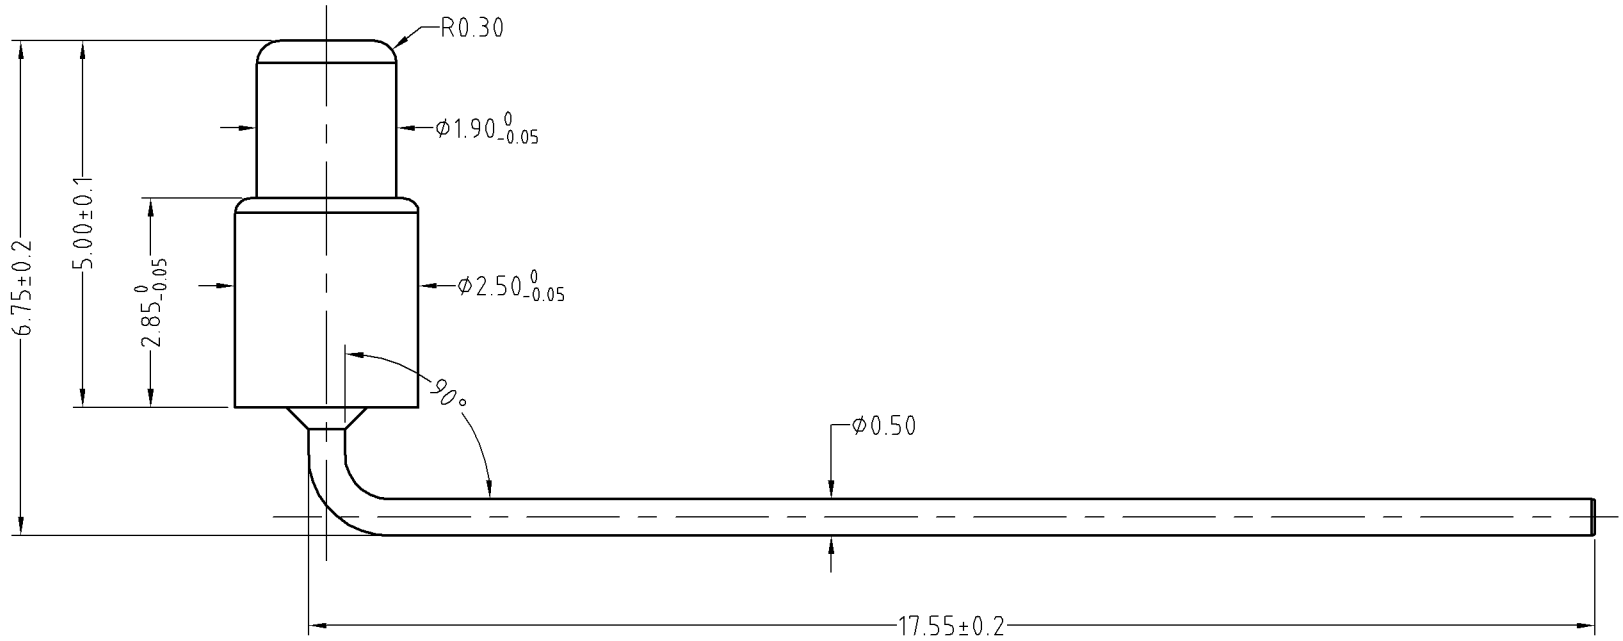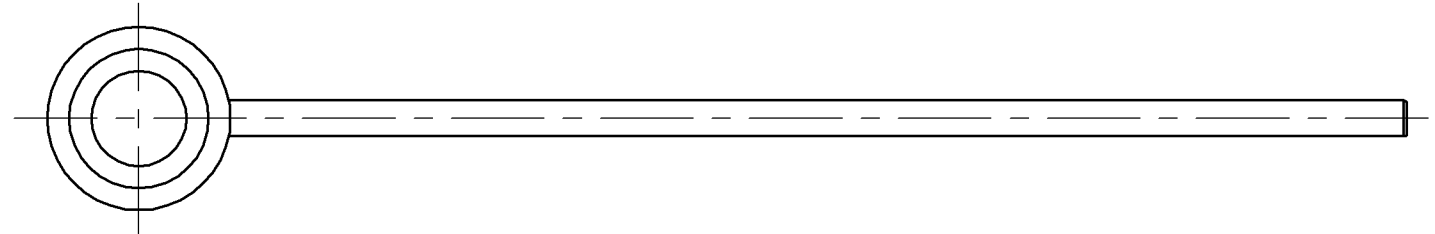

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.						
ANGEL	±1°	A4	SHEET: 1 of 1						
0.000	±0.02								
0.00	±0.05	DRAW							
0.0	±0.10	CHECK							
ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO	GENERAL TOLERANCE UNLESS OTHERWISE NOTED	APPRO	PART NO.	BP10121
								FILE NAME	BP10111
								TITLE.	Pogo pin connector

A

B

C

D