HSF	禁止使用1级环境管理物质

To ensure the best usage, please operate it based on the working height.
Based on the engineering drawings, shall not exceed the maximum allowed compression.

Approve Sign

Note:
Materials:
.Plunger: Brass 20u" Au over 50u" Ni
.Barrel: Brass 20u" Au over 50u" Ni
.Spring: SUS 1u" Au
Mechanical:
.Contact force: 120g±20% at 6.80mm working height
.Life test: 100,000 cycles
Electrical:
.Rated current & voltage: DC 12V; 1A
.Contact resistance: 50 milliohm Max.

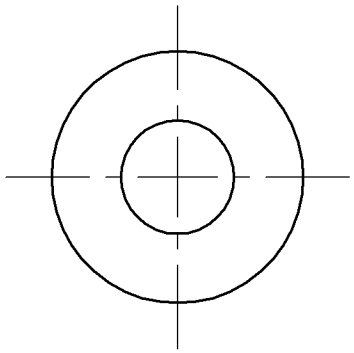

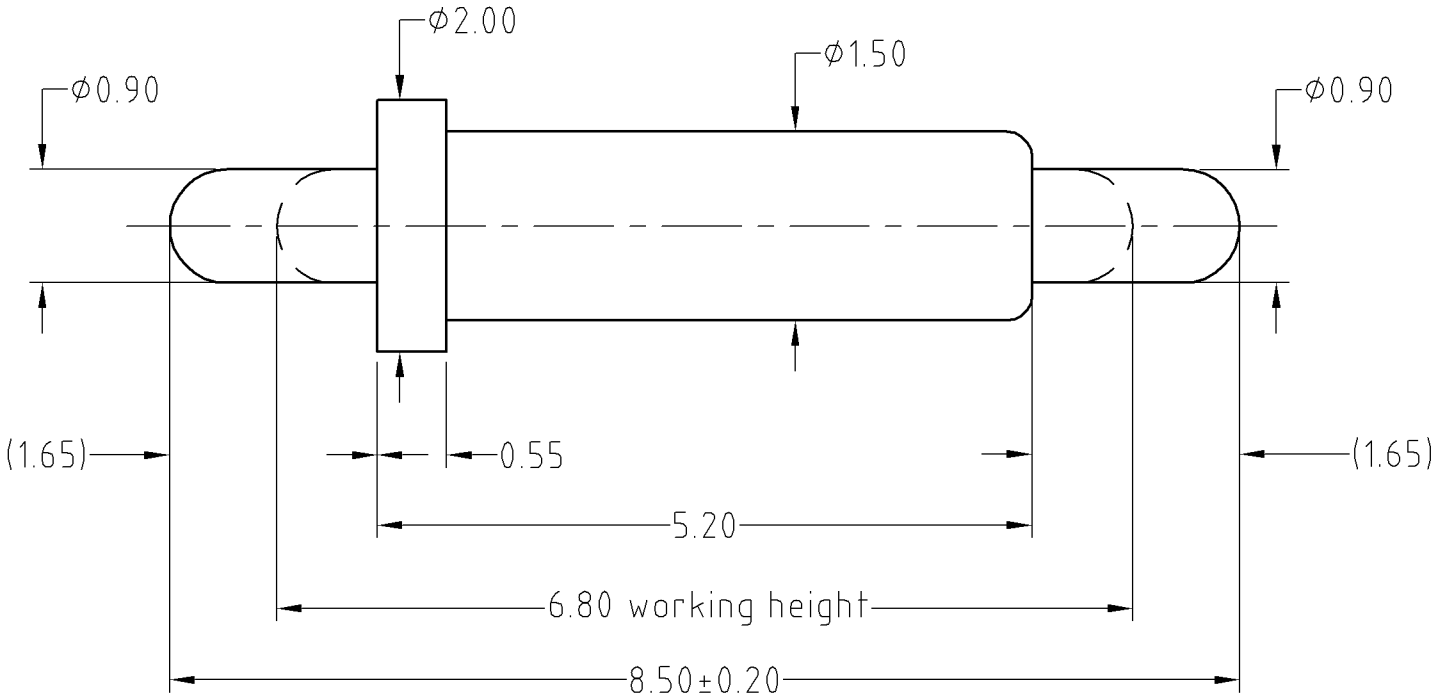

SCALE	10:1	UNIT:mm	THIS DOCUMENT IS THE SOLE PROPERTY OF CFE CORPORATION CO.,LTD., AND SHOULD NOT BE USED IN WHOLE OR IN PART WITHOUT PRIOR WRITTEN PERMISSION.	东莞市川富电子有限公司 CFE CORPORATION CO.,LTD.	
ANGEL	±1°	A4			
0.000	±0.02		SHEET: 1 of 1		
0.00	±0.05	DRAW		PART NO.	BD021XX
0.0	±0.10	CHECK		FILE NAME	BD02111
GENERAL TOLERANCE UNLESS OTHERWISE NOTED		APPRO		TITLE.	Pogo pin connector

ECN(DCN) NO.	REV	DATE	DESCRIPTION	CHANGE	APPRO
———	D0	2012.03.06	NEW		